


Rozmery

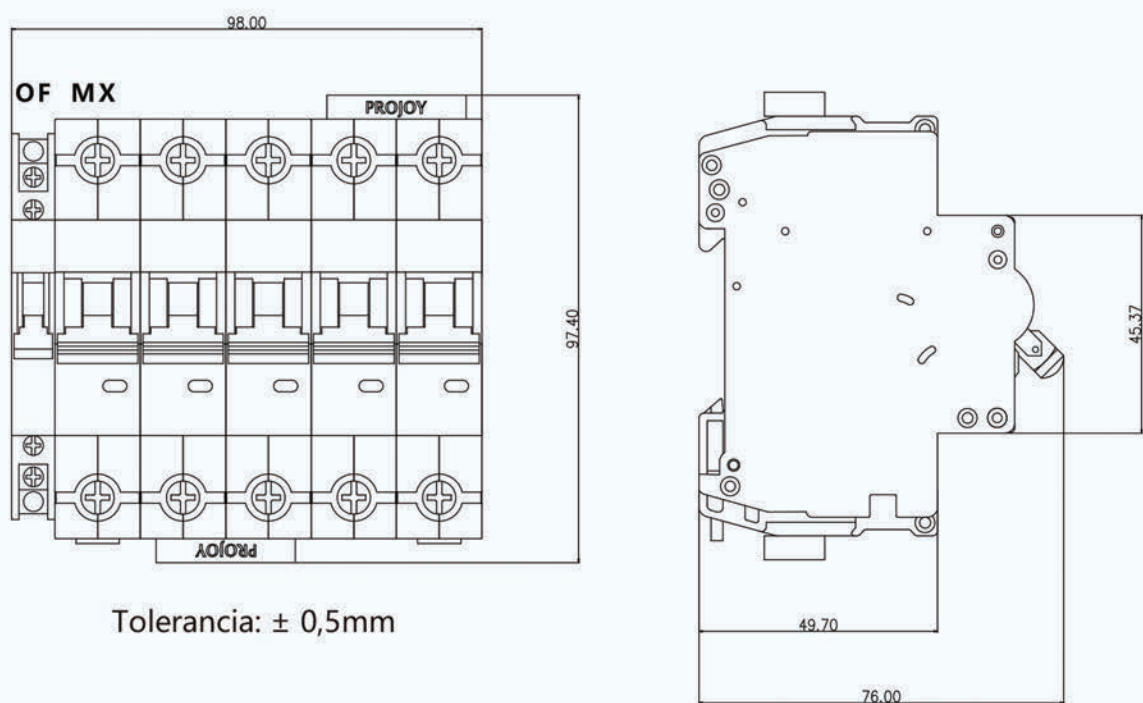

Redukčný koeficient

Teplota redukčného koeficientu																				
Teplota	-30°C	-25°C	-20°C	-15°C	-10°C	-5°C	0°C	5°C	10°C	15°C	20°C	30°C	35°C	40°C	45°C	50°C	55°C	60°C	65°C	70°C
Koeficient menovitého pracovného prúdu	1.242	1.223	1.204	1.182	1.161	1.143	1.127	1.103	1.079	1.063	1.047	1	0.984	0.968	0.952	0.922	0.904	0.891	0.872	0.844

Redukčný koeficient nadmorskej výšky				
Nadmorská výška m	2000	3000	4000	5000
Koeficient menovitého pracovného prúdu	1	0.96	0.91	0.86
Koeficient menovitého pracovného napätia	1	1	1	1
Menovitý koeficient priemyselného frek. odporu	1	0.9	0.82	0.71
Menovitý koeficient nárazovej tolerancie napätia	1	0.9	0.82	0.71
Menovitá maximálna skratová kapacita a koeficient elektronickej životnosti	1	0.82	0.7	0.6

Redukčný koeficient inštalácie MCB vedľa seba					
Počet of MCB	1	2 ~ 3	4 ~ 5	6 ~ 8	9 ~ 10
In≤25A coefficient	1	0.96	0.9	0.8	0.7
32A≤In≤63A coefficient	1	0.92	0.8	0.7	0.6
80A≤In≤125A coefficient	1	0.9	0.8	0.7	/

Rozmery

PEBS-H-63

jednotka: mm

